



(Contact Example NO-NO without liquid)

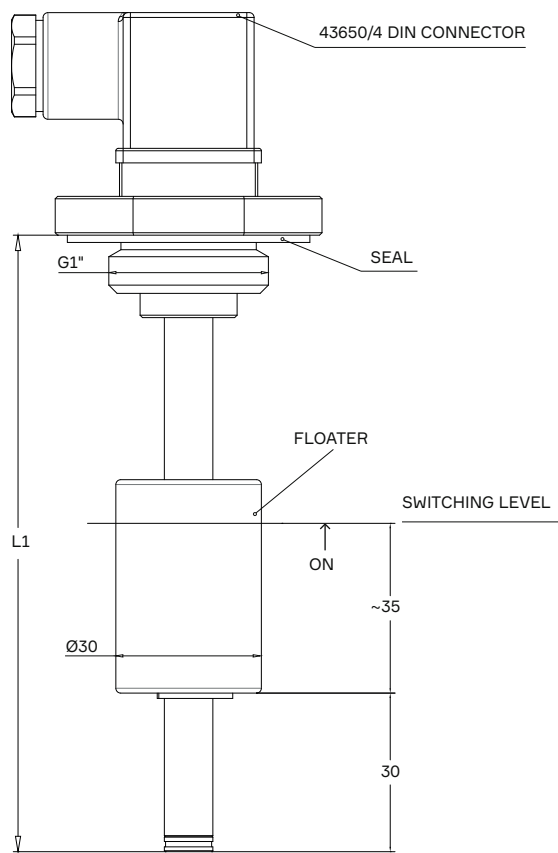

Connection holes	Electrical features	Technical features	Materials:
• Three holes flange - 120° • Two holes flange - 180° • 1" BSPP Three types of connections in a single execution.	• Electrical connection in accordance with DIN 43650/A • Electrical protection in accordance with DIN 40050 - IP 65 • Maximum electrical load NO / NC: 30V AC / DC - 0.25A • Other electrical features on request.	• Max pressure: 5 bar • Max fluid viscosity: 150 cSt • Fluid temperature: -10 ÷ 90 °C	• Rod: Stainless Steel 316 • Floater: PA66 • Housing: Anodized Aluminum

Select specifications for product coding

1.	Rod Length L1 (mm)	015 150	020 200	025 250	030 300	035 350	040 400	045 450	050 500	055 550	060 600
2.	Floater electrical configuration									A Normally Open	C Normally Closed
3.	Switching Temperature (°C)				030 30	040 40	050 50	060 60	070 70	080 80	090 90
4.	Thermostat electrical configuration									A Normally Open	C Normally Closed
5.	Customizations									.00 Standard	.XX Costumized product

LA1T

1.	2.	3.	4.	5.
----	----	----	----	----