PE5

ELECTRICAL DIFFERENTIAL PRESSURE INDICATOR
MAGNETIC DRIVE - SPDT

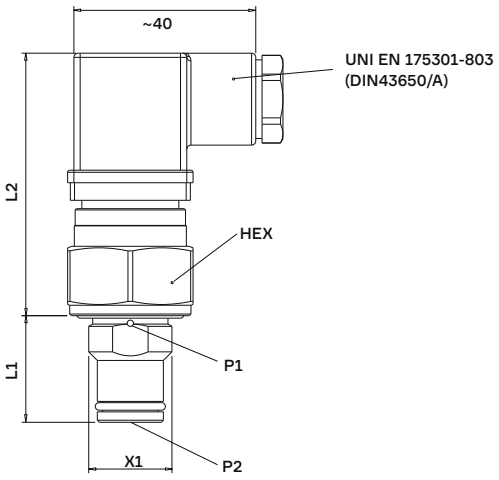



ELECTRICAL CONDITION



A (P1-P2)≥ΔP

B (P2-P1)≥ΔP

Overpressure limit	600 bar	**Fluid Type**	Oil	**Standard protection level**	Connection DIN EN 175301-803-A (DIN43650/A) - IP65 ** See the attachment caps and connectors*
Working pressure	450 bar	**Operating temperature**	-30°C + 140°C	**L2 Dimension:**	Config / .E0 66 mm Config / .L0 66 mm
		Drive type	Magnetic		

Select specifications for product coding

1. Working Logic

A	B
(P1-P2)	(P2-P1)

2. Threads (X1)
* L1 Customizable Value

09	35
1/2" BSPP L1 25,5 mm	M20X1,5 L1 25,5 mm

3. Electrical Load

4	5
12V/ 100 mA Gold Plated	48Vdc / 4A

4. Electrical Condition

S
SPDT

5. Housing Material

A	B
Aluminum	Brass

6. Seals

N	V
NBR	FKM

7. Customizations
* See the attachment caps and connectors

.E0	.L0	.XX
DIN Connector EN 175301-803-A (DIN43650/A) - IP65	LED DIN Connector EN 175301-803-A (DIN43650/A) - IP65	Costumized product

8. Adjustments (bar)
* Tolerance

1,3	2	2,5	3	5	8
±15%	±10%	±10%	±10%	±10%	±10%

PE5	1.	2.	3.	4.	5.	6.	7.	8.

VIBOR

Vibor s.r.l.
Via Grazioli 57
20161 Milano

www.vibor.it
info@vibor.it
T (+39) 02 66 204 556

Release 01